


CAT5E UTP 0.50CCA 4P PVC

CONSTRUCTION & DIMENSION

Conductor	Material :	CCA
	Size :	24AWG*4P
	Construction :	1/0.50±0.01MM
Insulation	Material :	PE
	Avg.Thickness :	0.20MM
	Min. Thickness :	0.18MM
	Diameter :	0.91±0.03MM
Inner Layer	Direction :	S
	Pitch :	30mm underneath
Outside Layer	Direction :	S
	Pitch :	180mm underneath
Filler	Material :	Nylon
Jacket	Material :	PVC
	Avg.Thickness :	0.53MM
	Min. Thickness :	0.50MM
	Diameter :	5.1±0.02MM
	Color :	White
Packing	305M / BOX	

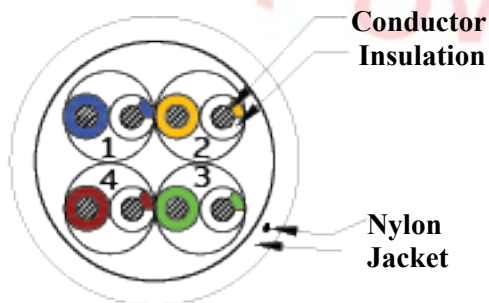

CROSS-SECTION

Insulation Color :

- 1.Blue&White / Blue
- 2.Orange&White / Orange
- 3.Green&White / Green
- 4.Brown&White / Brown

ELECTRICAL PROPERTIES

Solid conductor resistance :	≤ 27.2Ω/100M at 20°C
Insulation Resistance :	Min.5000mega ohms-km at 20°C
Dielectric Test :	1000V DC/1min;No Breakdown

DESCRIPTION

Rating Temperature :	75°C
Voltage Rating :	30V